


Lumens: 50
 Color temperature: 3000K 4500K 6500K
 Batteries: AAA x 4
 Number of LEDs: 6
 LED beam angle: 120°
 Remote control range: 15 feet, 4.5 meters
 Number of lights controlled by one remote: 12
 Brightness settings (hold - + to set brightness): 50%,100%
 Timer settings (minutes): 15, 30, 60, 120
 Dimensions:
 8.46 in wide / 1.97 in deep / 0.55 in high


LOCATION OF CONTROLS

- 1.On/off Light switch
- 2.Color temperature adjustment
- 3.Brightness control
- 4.Timing function
- 5.Lampshade key
- 6.High brightness lamp bead
- 7.Built-in strong magnetism
- 8.Battery compartment



INSTALLATION

- 1.Built-in powerful magnet can be directly adsorbed and installed on the metal surface.
- 2.Installation on nonmetallic surfaces can be carried out by using the self-contained installation patch.

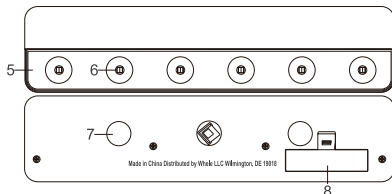

OPERATING INSTRUCTIONS

Short press lampshade: The light switch adjusts three light colors.

Long press lampshade: Adjust the brightness of lights

Remote control: Remove plastic insulation TAB prior to USE
 Operate the lights up to 15 feet 4.5 meters) away with the remote.
 The remote uses infrared technology. Physical barriers between

Power Buttons: ON = Turn on the lights. OFF = Turn off the lights.


Color temperature of light: WW:(Warm light 3000K) NW:(Natural light 4500K) CW:(White light 6500K)

Dimmer Buttons: Hold + to increase brightness or - to decrease brightness. Press 50% or 100%.
 Brightness level can only be controlled by the remote. Lights will default to last brightness setting.

Timer: Press desired timer option (15, 30, 60, 120 minutes). Lights will flash to confirm setting
 Reset timer by turning puck lights off

BATTERY INSTALLATION

Light batteries: Remove battery compartment cover. Lift compartment cover. Insert three (3) new AA batteries. Follow the battery polarity guide. Replace battery compartment cover. Remote battery: A CR2025 battery is pre-installed in the remote Remove plastic insulation tab prior to use. bottom of remote. Slide out battery compartment. Remove old battery. Insert one (1) new CR2025 battery. Follow battery polarity guide. Replace battery compartment. Tighten screw.

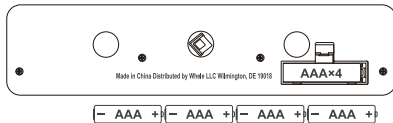

BATTERY PRECAUTIONS

1. Use only the size and type of batteries specified
2. Always purchase the correct size and grade battery most suitable for the intended use.
3. Follow the correct battery polarity. Reversed batteries may cause damage to the device.
4. Do not mix alkaline, standard (Carbon-Zinc), or rechargeable (Nickel Cadmium) batteries.
5. Replace all batteries of a set at the same time. Do not mix old and new batteries.
6. Clean the battery contacts and those of the device prior to the battery installation.
7. Do not dispose of batteries in fire.
8. Remove batteries if consumed or if product is to be left unused for an extended period of time.

